

Fig. 1a

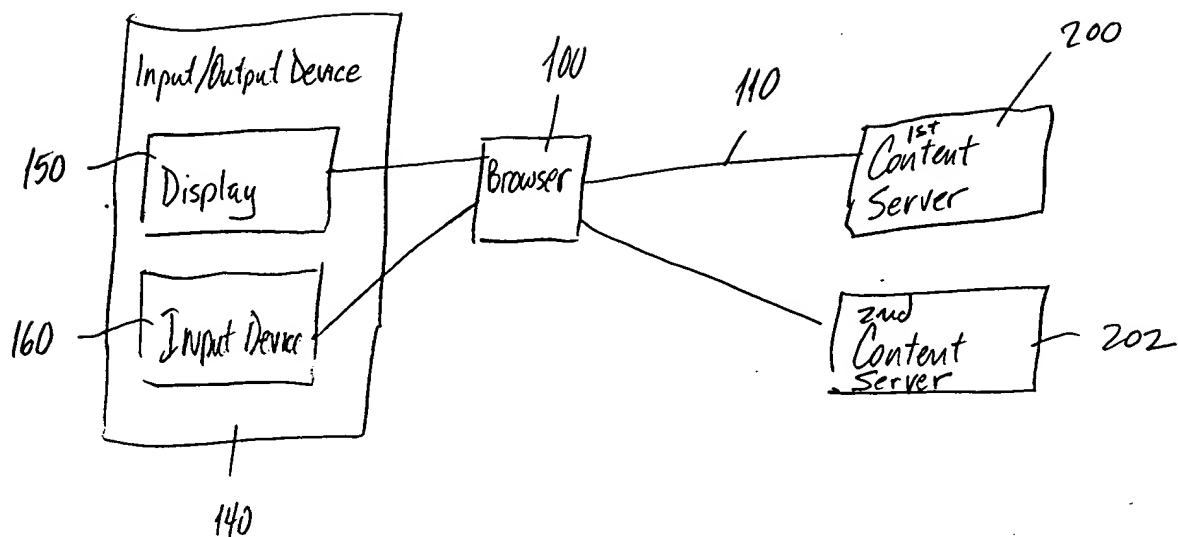


Fig. 1b

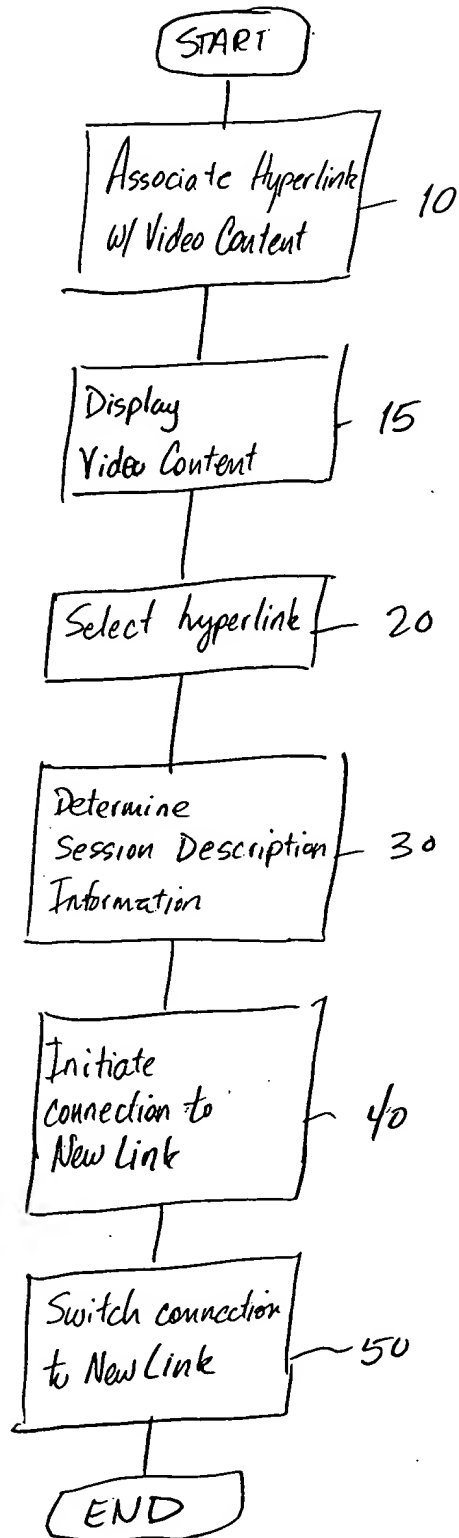


Fig. 1c

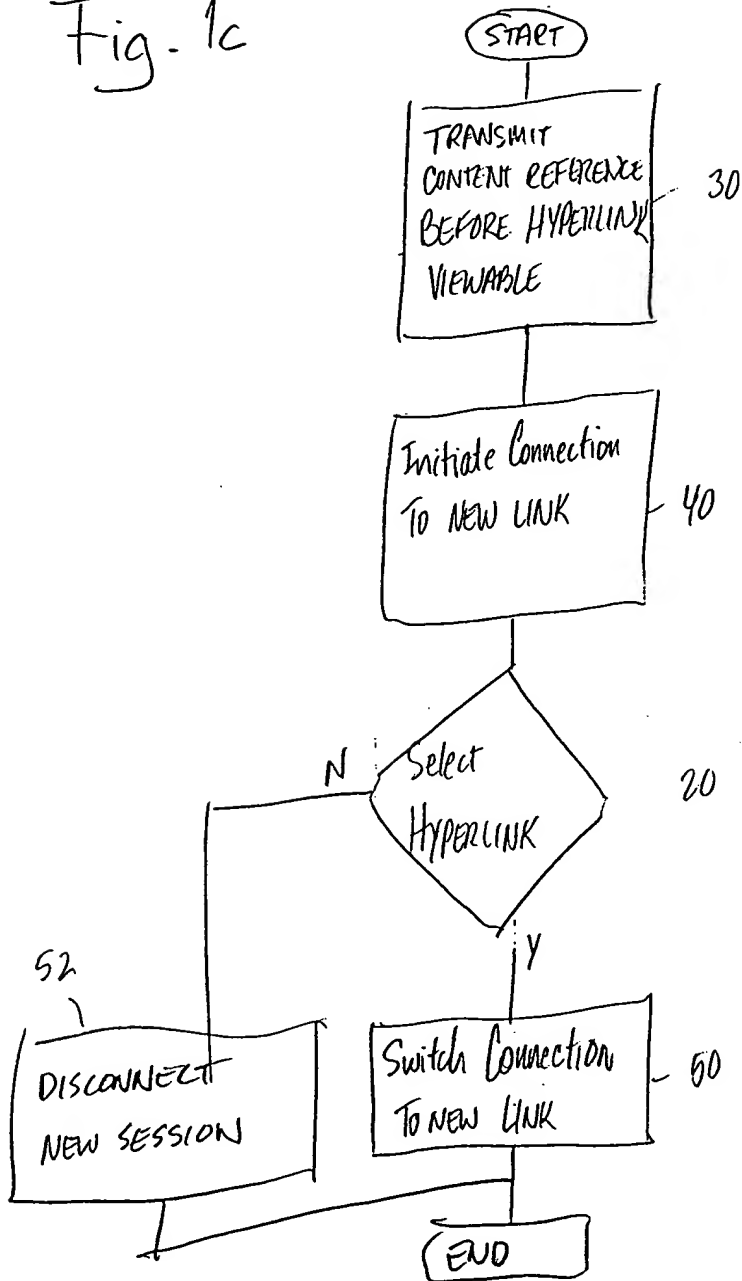


Fig. 1d

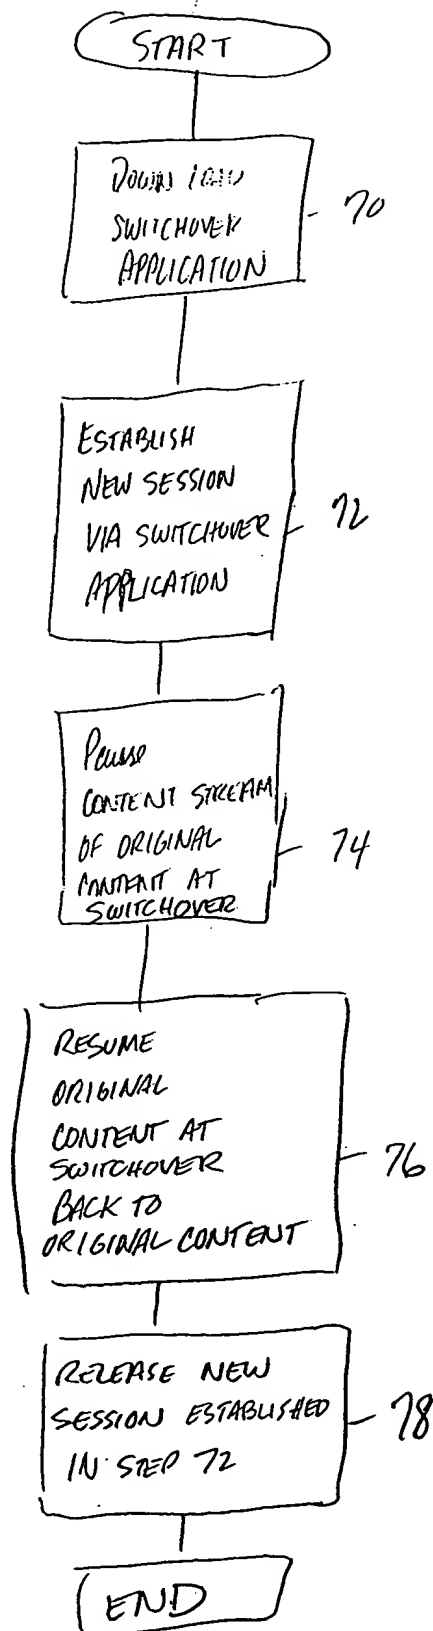


Fig. 2a

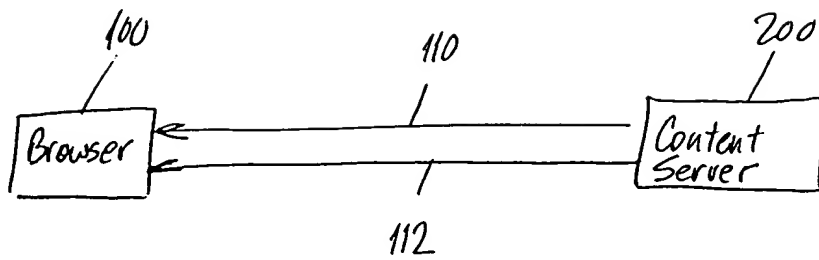


Fig. 2b

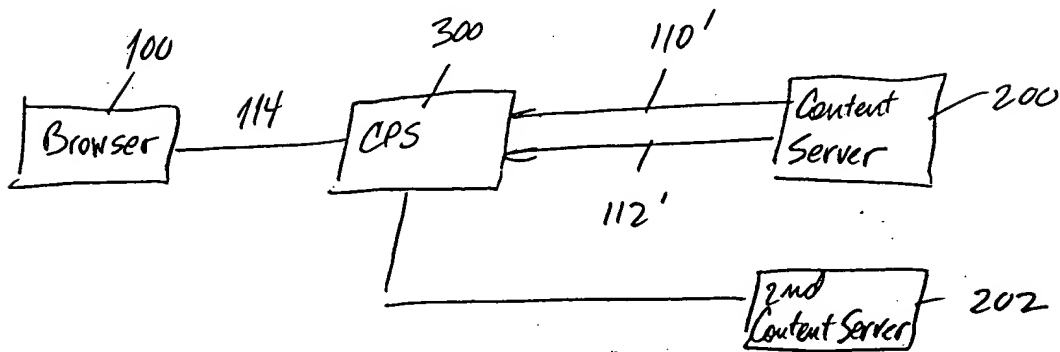


Fig. 2c

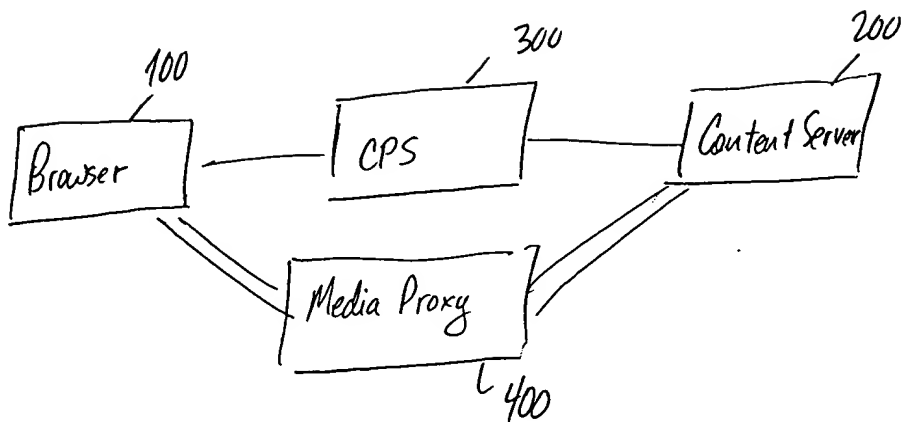


Fig. 2d

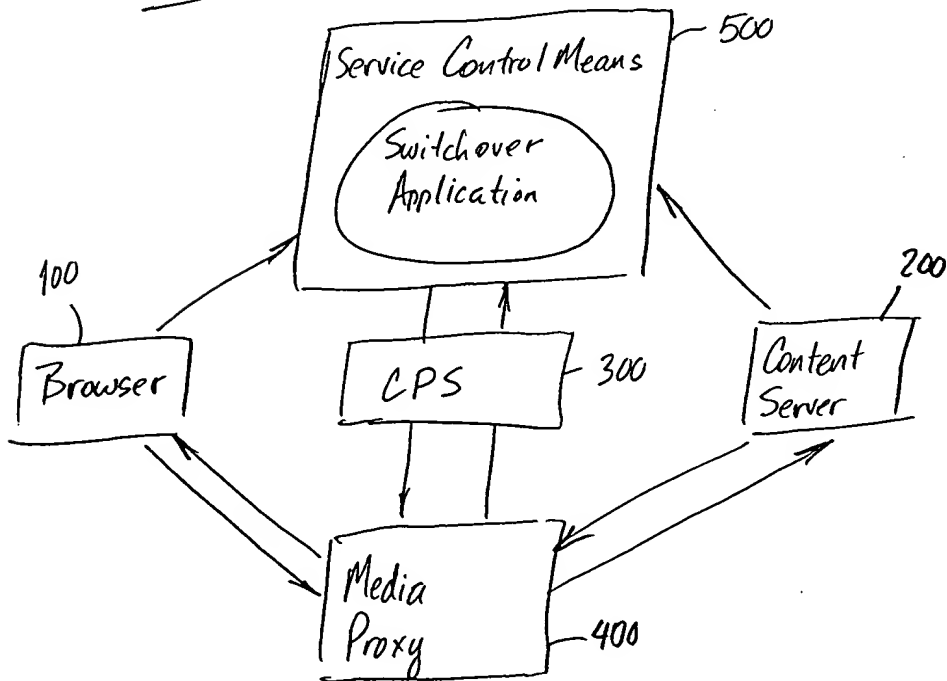


Fig. 3



Fig. 4

BROWSER

CONTENT SERVER

← t_0 switch over application

schedule 1	content reference for hyperlink 1
t_1-k : availability clock	URL
t_1-k+e : switchover application downloading	session description
$t_1-k+e+e$: new session establishment	visualization
t_1 : visualization	coordinate ranges
← <u>t_1+e : switchover or disconnect</u>	

Schedule 2

t_2-k : server selection	content reference for hyperlink 2
t_2-k+e : new session establishment	URL
t_2 : visualization	session description
t_2+e : switchover or disconnect	visualization
	coordinate ranges

←